

CFMC (-W)

HORIZONTAL INSERT FILTER


This equipment adopts the integrated design of filter and fan, which is open at the bottom and directly connected to the equipment that needs dust removal. The equipment has a low height and a large opening area at the bottom, so it has the advantages of simplicity and flexibility, saving installation height, and large suction area. It is widely used in food, chemical, cement, mining industry etc, for dust removal of conveying equipment and bin etc.




GOLDEN GRAIN

info@g-grain.com

More details please visit www.g-grain.com and download

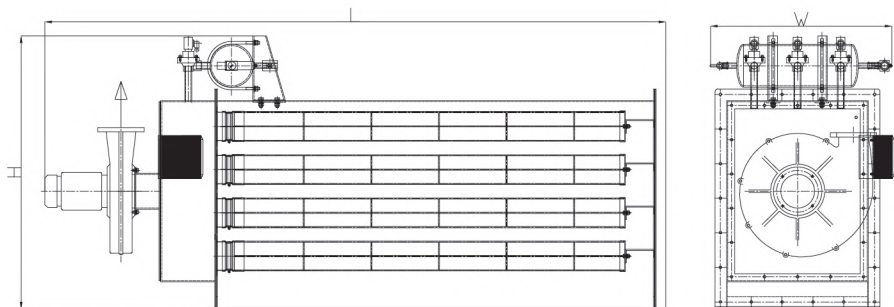

Side View

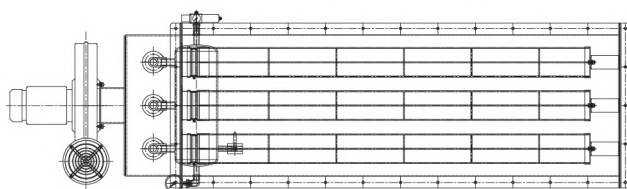

Top View

Model	Sleeve length (mm)	Handling air volumn (m³/h)	Filter area (m²)	Equipment resistance (pa)	Dedusting efficiency	Fan		
						Model	Air volumn (m³/h)	Power (kw)
CFMC-12W	1200	324-1458	5.4	≤800	≥99.5%	≥99.5%	1500	1.5
	1500	405-2025	6.8					

1. Filtration air speed: 1-5m/min

2. Air leakage rate: ≤5%.