

DSF

DRUM DETACHER




Solid construction in sheet-steel, cylindrical shape, with mounting plates for floor or ceiling fixing. Inside rotor with inclined bladed bars and supports on ball bearings suitable for high r.p.m range. Some impact plates are fixed on inside wall in order to increase the braking up action. A tight joint inspection door. It is utilized at the outlet of reductions for breaking up the flour particles.



GOLDEN GRAIN

info@g-grain.com

More details please visit www.g-grain.com and download

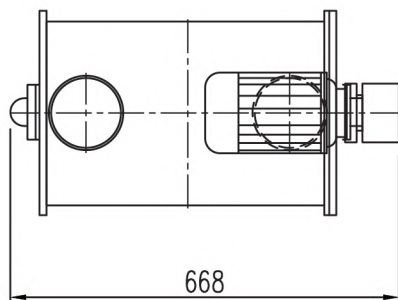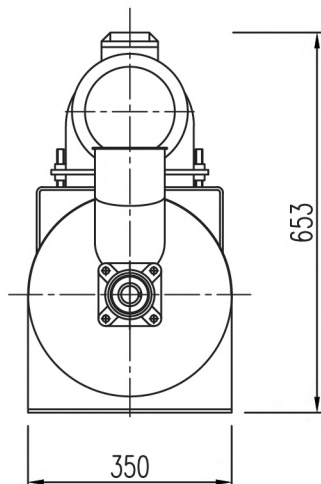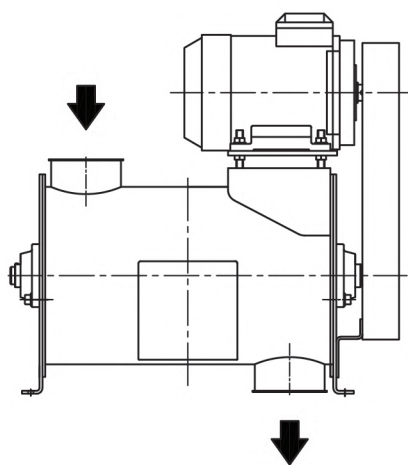

Model	DSF-30		
Rotor speed (rpm)	960		
Power (kw)	3	4	5.5
Shaft speed (rpm)	1430	1440	1440
Capacity (t/h)	1.3-1.6	1.7-2.1	1.8-2.2
Weight (kg)	126	132	155