

DYSD/DYSS




ROTARY SIFTER

DYSD/DYSS rotary sieve utilized within wheat cleaning, flour and feed mill operations. The machine can remove various large impurities or can grade material into a fine and coarse separations. This can ensure that the purity and grade of material for wheat screenings flour or feed which can be sent to the next equipment step. Different machine types are available to suit varying applications and capacity.



info@g-grain.com

More details please visit www.g-grain.com and download

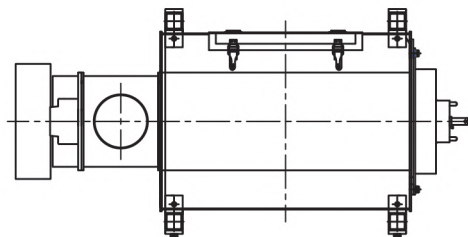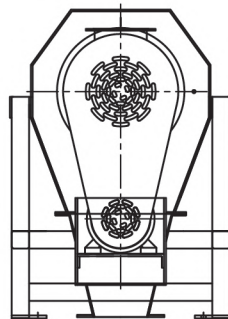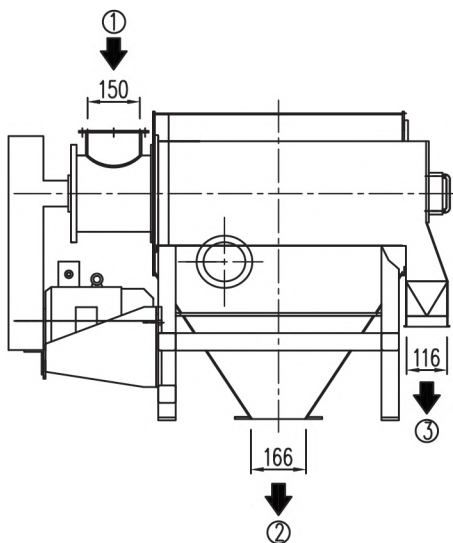

- ① MATERIAL INLET
- ② PRODUCT OUTLET
- ③ IMPURITIES OUTLET

Model	Cylinder dia (mm)	Cylinder dia (mm)	Rotate speed of striker(r/min)	Capacity(t/h)					Air volume (m³/min)	Power (kw)	Weight (kg)
				Dia of sieve mesh(mm)							
				Ø1.0	Ø1.5	Ø3.0	Ø3.0	Ø4.0			
DYSD-40×90	400	900	560-600	10	15	30	30		12-16	5.5	400
DYSS-40×90×2	400×2	900×2	560-600	20	30	60	60		12-16	11	600
DYSD-30×71	300	710	550		3-5	8-10	8-10	10-12	6-8	3	260