


SFS





TWIN SIFTER & TWIN CHECK SIFTER

SFS twin sifter utilized as a final check (security) sifter before flour is sent to flour storage or packing machine to ensure bran particles or particles bigger than flour particles are removed.

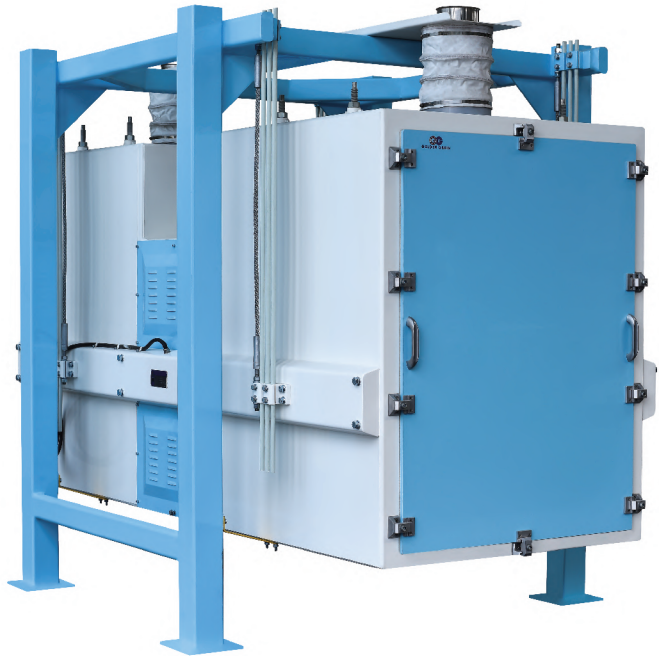

info@g-grain.com

More details please visit www.g-grain.com and download

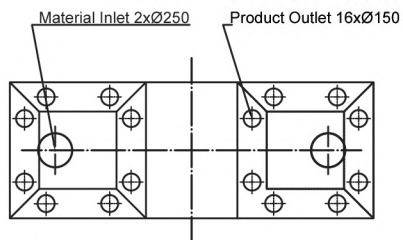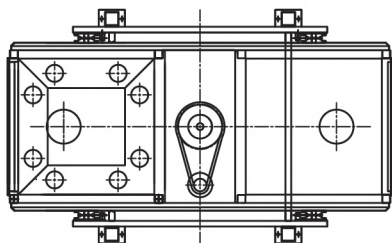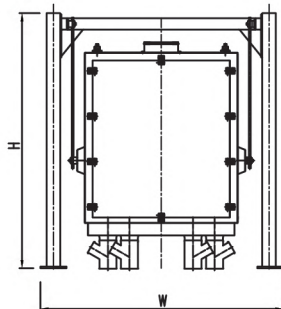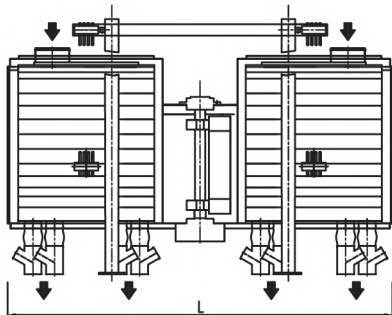

Model	Sieve frame Qty.	Net sieve area (m ²)	Shaft speed (rpm)	Capacity (t/h)	Circle dia. (mm)	Motor (kw)	Weight (kg)	Outline size L×W×H (mm)
SFS - 740	8-12	14.4	265	3-3.5	45-55	1.1	550-650	2300×1450×1760
SFS - 830	8-12	16.8	255	5-11	45-55	1.5	750-1200	2462×1751×2250
SFS - 1000	10-12	18.8	255	8-20	52-55	2.2	1800-2200	2932×1921×2250
SFS - 1200	10-12	28.2	255	20-30	52-55	4	2500-2800	3392×2121×2250