


LGBG/W


CHAIN CONVEYOR

This CHAIN CONVEYOR is mainly used for the horizontal transportation of granular and powdery materials. It is suitable for multi-point feeding and multi-point discharging, making it ideal for integrated material handling systems. The design ensures smooth and efficient conveying, with reliable performance across various industrial applications.

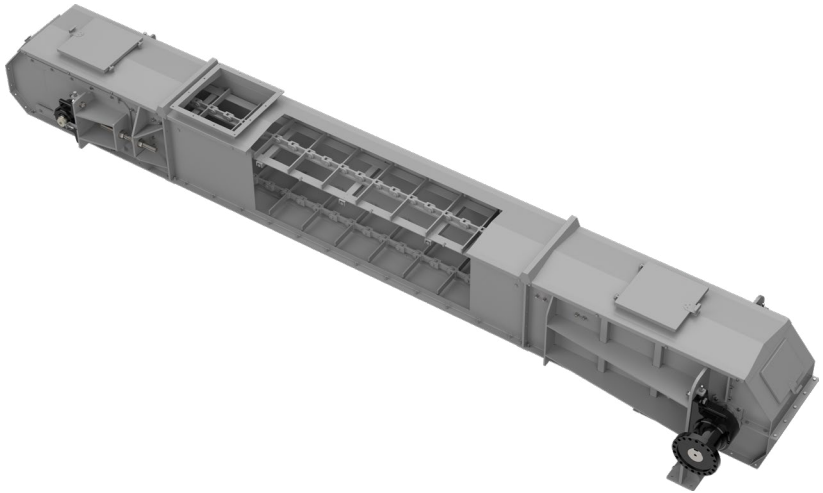

info@g-grain.com

More details please visit www.g-grain.com and download

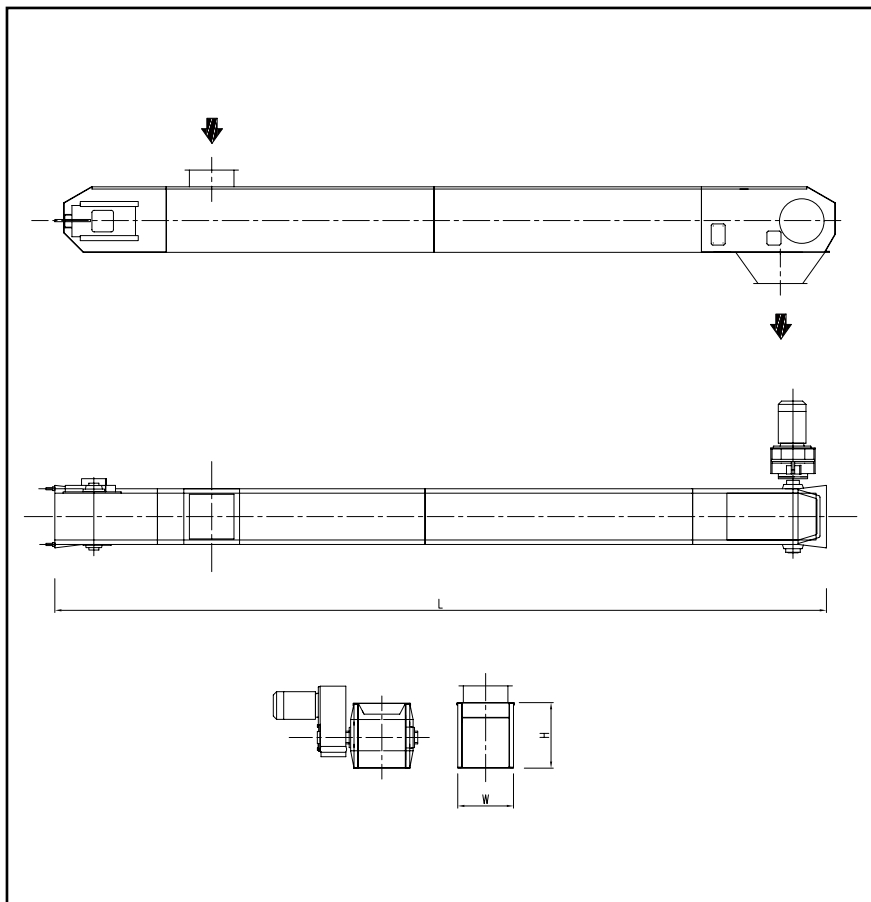

Model	Width (mm)	Chain Speed (m/s)	Capacity (t/h)
LGBG-16	160	0.3–0.5	5–20
LGBG-20	200	0.3–0.5	10–30
LGBG-25	250	0.3–0.6	20–50
LGBG-32	320	0.3–0.7	30–100
LGBG-40	400	0.3–0.7	50–200
LGBW-50	500	0.4–0.8	100–300
LGBW-60	630	0.4–0.8	200–500
LGBW-80	800	0.4–0.8	300–800
LGBW-100	1000	0.4–0.8	550–1100
LGBW-130	1300	0.4–0.8	1300

Note: Capacity is based on bulk density 0.75t/m³.