


# LGBM/G


## CHAIN CONVEYOR

This CHAIN CONVEYOR is mainly used for the horizontal transportation of granular and powdery materials. It is suitable for multi-point feeding and multi-point discharging, making it ideal for integrated material handling systems. The design ensures smooth and efficient conveying, with reliable performance across various industrial applications.

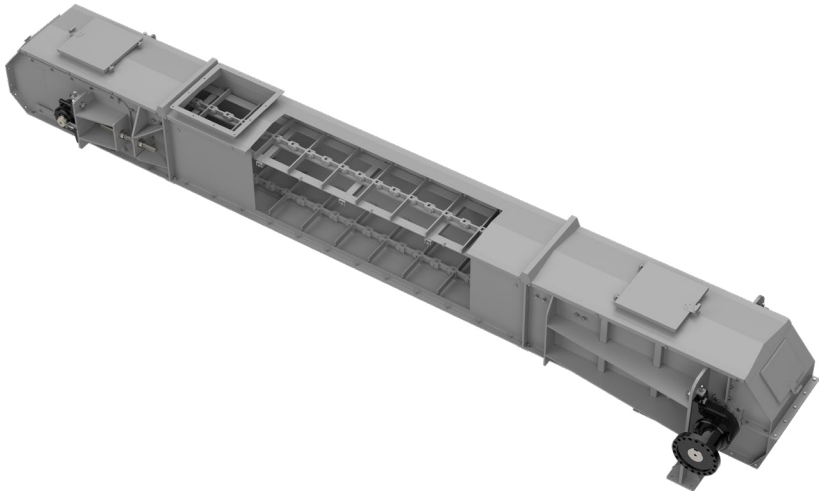

[info@g-grain.com](mailto:info@g-grain.com)

More details please visit [www.g-grain.com](http://www.g-grain.com) and download

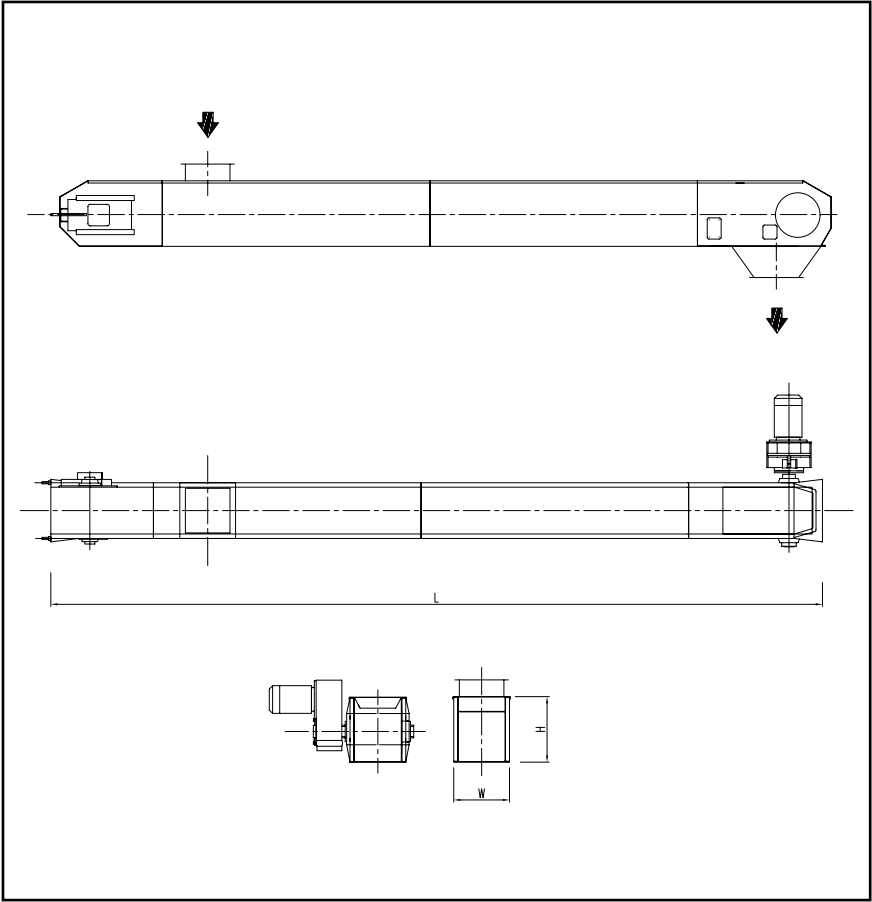

Model	Width (mm)	Chain Speed (m/s)	Capacity (t/h)
LGBM/G-16	160	0.3–0.5	5–20
LGBM/G-20	200	0.3–0.5	10–30
LGBM/G-25	250	0.3–0.6	20–50
LGBM/G-32	320	0.3–0.7	30–100
LGBM/G-40	400	0.3–0.7	50–200
LGBM/G-50	500	0.4–0.8	100–300
LGBM/G-63	630	0.4–0.8	200–500
LGBM/G-80	800	0.4–0.8	300–800
LGBM/G-100	1000	0.4–0.8	550–1100
LGBM/G-130	1300	0.4–0.8	1300

Note: Capacity is based on bulk density 0.75t/m<sup>3</sup>.