

DPMX


FLOW BALANCER

This FLOW BALANCER is used to accurately meter incoming product at specified percentages—enabling precise blending of different wheat types and controlling material capacity to a desired level. It ensures consistent flow rates for optimized mixing and downstream processing, supporting both quality control and operational efficiency in grain handling systems.



info@g-grain.com

More details please visit www.g-grain.com and download

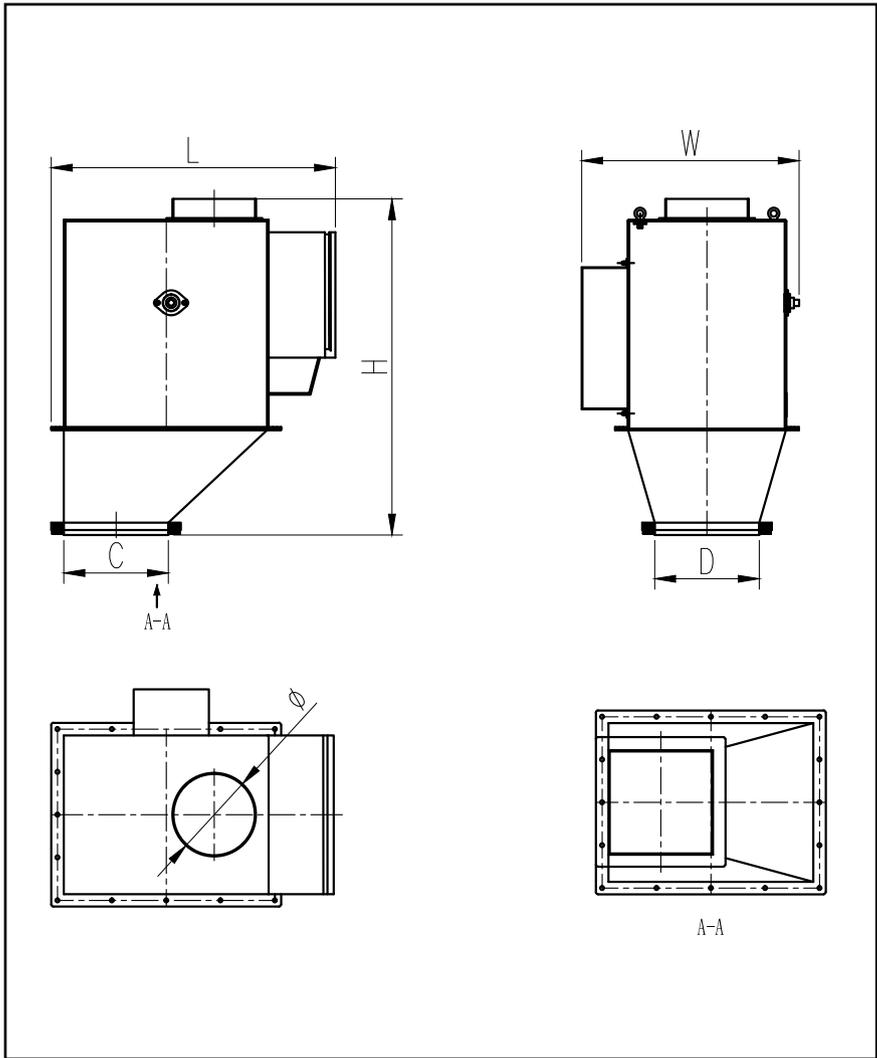

Model	Capacity (t/h)		Accuracy (%)	Inlet (mm)	Outlet (C×D) (mm)	Weight (kg)	Dimensions (L×W×H) (mm)
	Wheat	Maize					
DPMX-15	0.5-15	1-15	±1	Φ180	250×250	85	680×520×550
DPMX-30	15-30	15-30	±1	Φ180	250×250	85	680×520×550
DPMX-50	30-50	30-50	±1	Φ200	250×250	85	680×520×550
DPMX-100	50-100	50-100	±1	200×175	300×300	105	720×740×550

Note: At a capacity of 0.5-5 t/h, the accuracy is ±0.06 t/h.