

YLCX

MAGNET




This MAGNET is primarily used in the pre-cleaning section to remove ferrous contaminants from raw materials. It features two swing doors for easy access and cleaning. The staggered arrangement of magnetic bars ensures full contact with the material flow—enhancing separation efficiency.

Baffles positioned above the magnetic bars prevent direct impact and reduce wear, contributing to longer service life and consistent performance.



info@g-grain.com

More details please visit www.g-grain.com and download

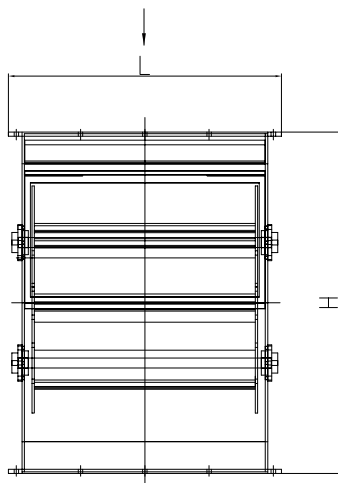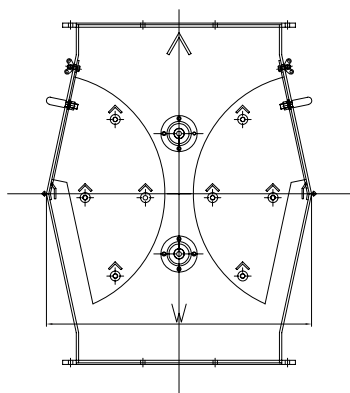

Model	Capacity (t/h)	Inlet (mm)	Magnetic Strength (GS)	Dimensions (L×W×H) (mm)
YLCX-150	150	570×400	5000/8000	572×490×670
YLCX-300	300	610×510	5000/8000	612×660×850
YLCX-400	400	700×600	5000/8000	700×748×1000