


# ZDS

## VIBRO GRAIN SEPARATOR

This machine is suitable for pre-cleaning in the wheat silo and the first cleaning in the wheat section in milling plant. The sieve frames can be equipped with different openings according to the wheat origin, degrees of impurities and cleaning levels required.

It is normally equipped with a vertical aspirator channel at the outlet to separate the dust from the raw material. The big and small foreign impurities will be removed from the machine.


This machine is simple with small footprint high cleaning efficiency and low power consumption.

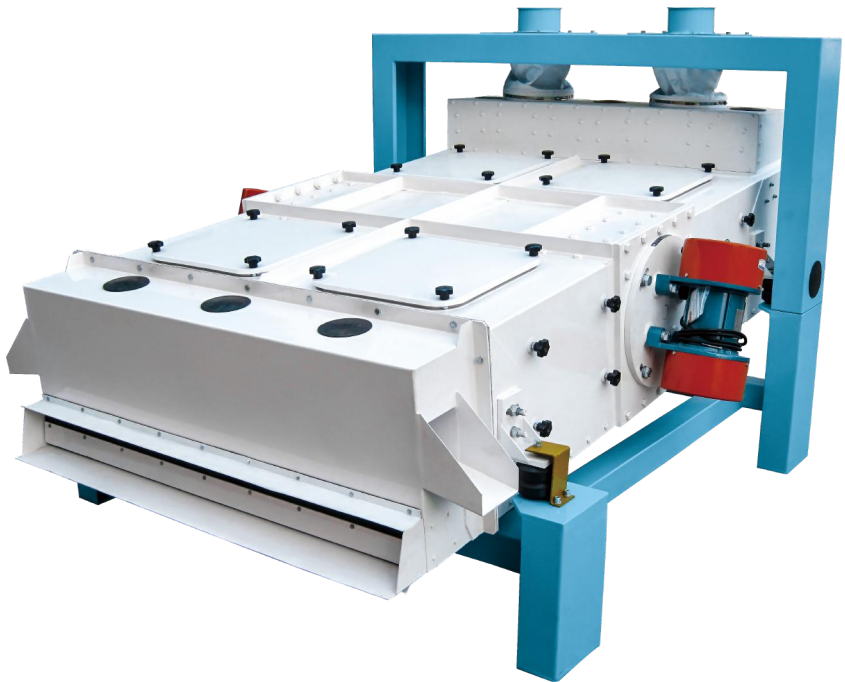

GOLDEN GRAIN

[info@g-grain.com](mailto:info@g-grain.com)

More details please visit [www.g-grain.com](http://www.g-grain.com) and download

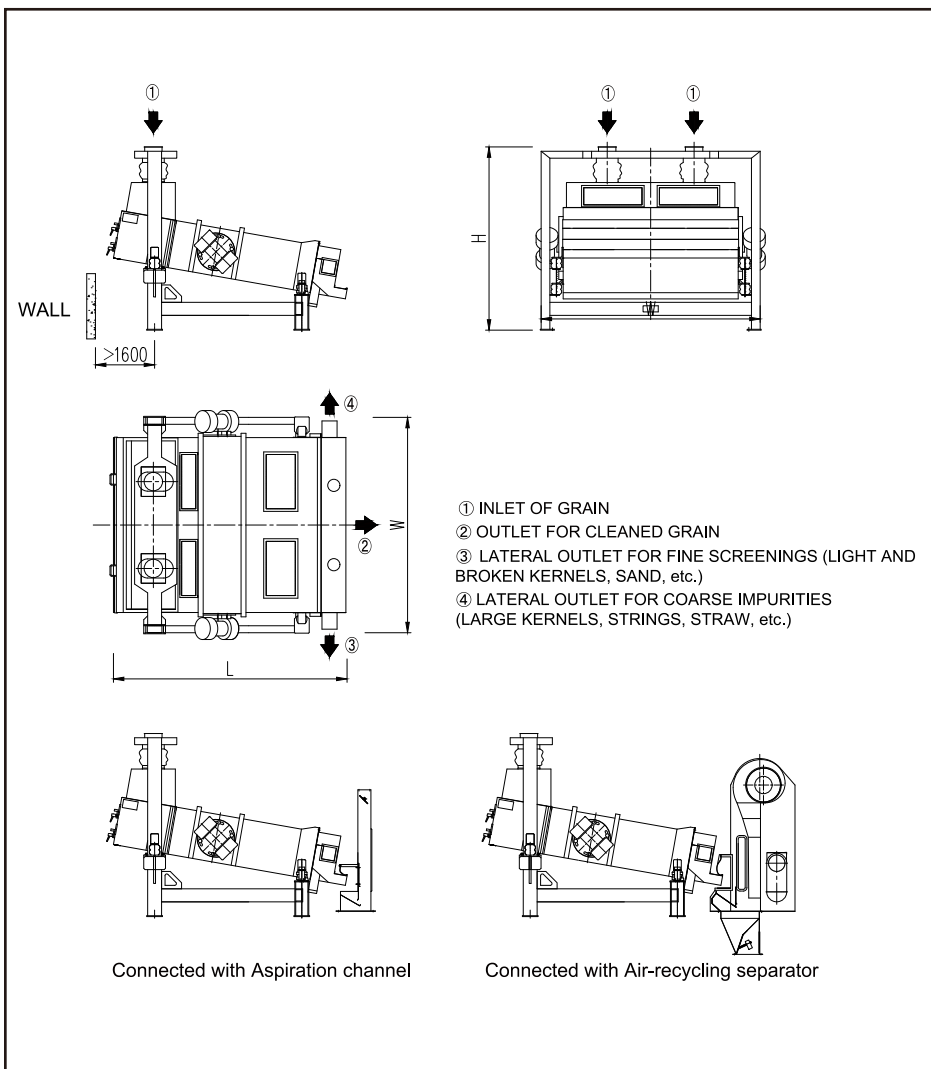

Model	Capacity (wheat)	Power	Air volume (Suction channel)	Weight	Sieve size (W×L)	Outline size (L×W ×H)
	t/h	kw	m³/min	kg	mm	mm
ZDS-100/150	12/37.5	2×0.37	60	620	1000×1500	2180×1563×1673
ZDS-100/200	15/45	2×0.37	75	720	1000×2000	2675×1563×1823
ZDS-150/150	15/45	2×0.55	100	935	1500×1500	2180×2115×1723
ZDS-150/200	20/60	2×0.55	115	1040	1500×2000	2675×2115×1823