

WDM

HORIZONTAL SCOURER


WDM horizontal scourer is used in the cleaning section for the surface treatment of wheat. The machine can remove impurities and any adhering contamination such as dust, sand, earth lumps, small seeds, etc. By removing these items, the product sanitation can be improved. The removed dust and impurities are discharged separately through an outlet.



GOLDEN GRAIN

info@g-grain.com

More details please visit www.g-grain.com and download

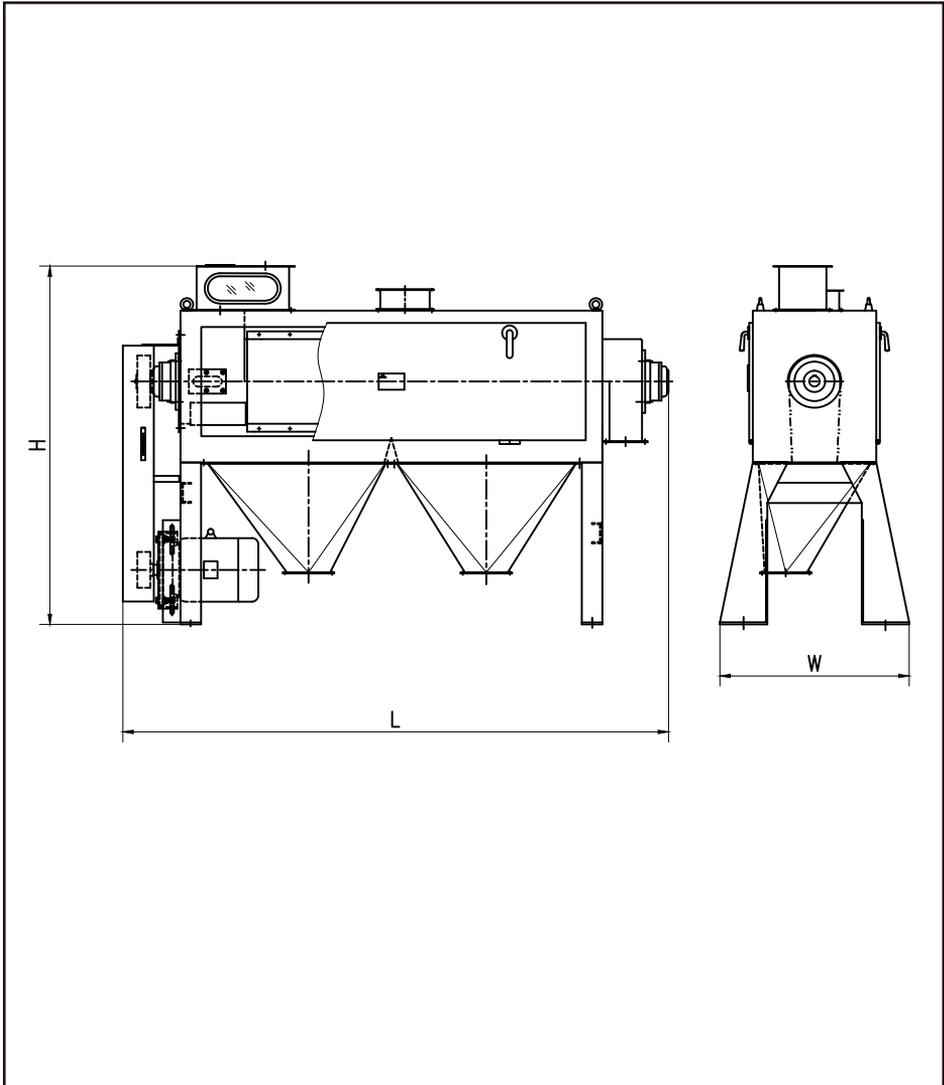

Model	Sieve Dia. (mm)	Sieve L (mm)	Rotation (r/min)	Capacity (t/h)	Power (kw)		Weight (kg)	Dimension LxWxH (mm)
WDM30×60	φ300	600	800~1200	2-4	4	5.5	450	1270x400x1210
WDM40×100	φ400	1000	800~1200	4-7	5.5	7.5	710	2130×920×1700
WDM40×150	φ400	1500	800~1200	7-10	7.5	11	750	2630×920×1700
WDM2×40×100	φ400	1000	800~1200	8-14	2x5.5	2x7.5	1200	2130×1490×1700
WDM2×40×150	φ400	1500	800~1200	14-20	2x7.5	2x11	1500	2630×1490×1700