


FQSBX

DESTONER


This DESTONER is designed for post-pre-cleaning grain processing, effectively removing stones, mud lumps, and light impurities from wheat and other cereals. It features a built-in fan that creates a self-circulating airflow, minimizing moisture loss, reducing energy consumption, and preventing dust emission.

The extended sieve provides a larger screening area and improved destoning efficiency, while the front-rear separated air control system allows independent airflow adjustment. The machine delivers excellent grading performance, high efficiency, low noise, and user-friendly operation and maintenance.

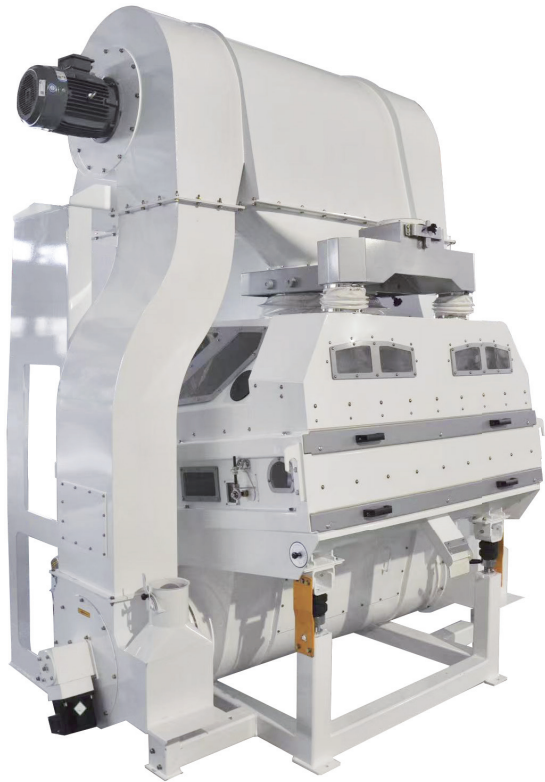

info@g-grain.com

More details please visit www.g-grain.com and download

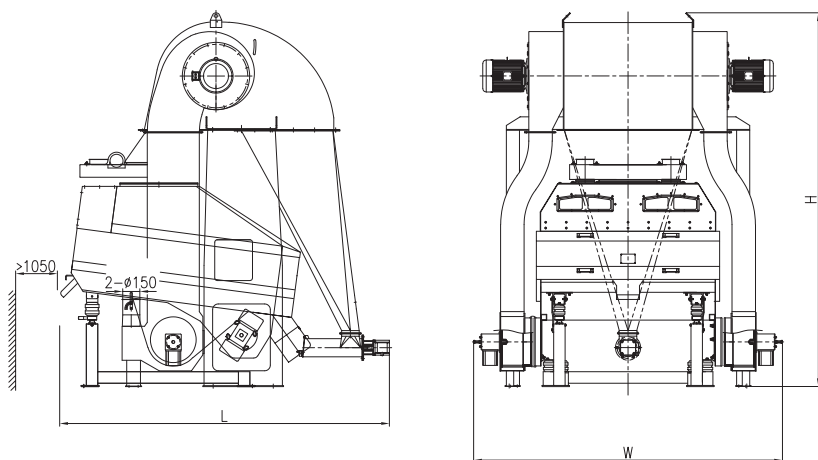

Model	Capacity (t/h)			Power (kW)	Air Lock Power (kW)	Aspiration Volume (m ³ /min)	Dimensions (L×W×H) (mm)
	Wheat	Paddy	Rice				
FQSBX-150/160	14-18	10-13	12-17	0.68×2+0.68×2+5.5×2	0.17×3	2×35	2873×2882×3275
FQSBX-180/160	18-28	13-20	17-23	0.75×2+0.75×2+7.5×2	0.17×3	2×45	2873×3185×3249

Note: The higher the moisture content of the material, the lower the capacity; the lower the bulk density of the material, the lower the capacity.