

LHCC

FLUIDIZER DISCHARGER


This FLUIDIZER DISCHARGER uses aeration to ensure smooth discharge of materials from silos, making it widely applicable in flour mills and grain processing plants. By introducing air at the bottom, it keeps the material in a fluidized state, preventing arching and blockages while allowing continuous and uniform flow.

With a compact design and easy installation, it is suitable for flour, wheat, starch, and other powder materials—an essential component for improving silo discharge efficiency and system stability.



info@g-grain.com

More details please visit www.g-grain.com and download

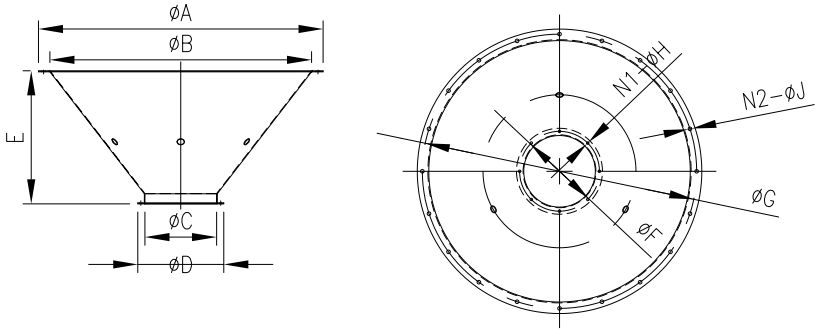

Model	Air Pressure (MPa)	Air Consumption (m ³ /h)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	N1 (pcs)	H (mm)	N2 (pcs)	J (mm)
LHCC-130/35	0.1-0.2	150-240	1390	1278	350	420	650	390	1340	8	12	20	18
LHCC-130/30	0.1-0.2	150-240	1390	1270	300	380	628	350	1330	8	14	20	18
LHCC-160/30	0.1-0.2	200-320	1732	1600	300	380	830	350	1680	8	14	30	27
LHCC-180/30	0.1-0.2	200-320	1890	1768	300	380	928	350	1830	8	14	32	27